
Designguide | Kridttavle til bord - tryk

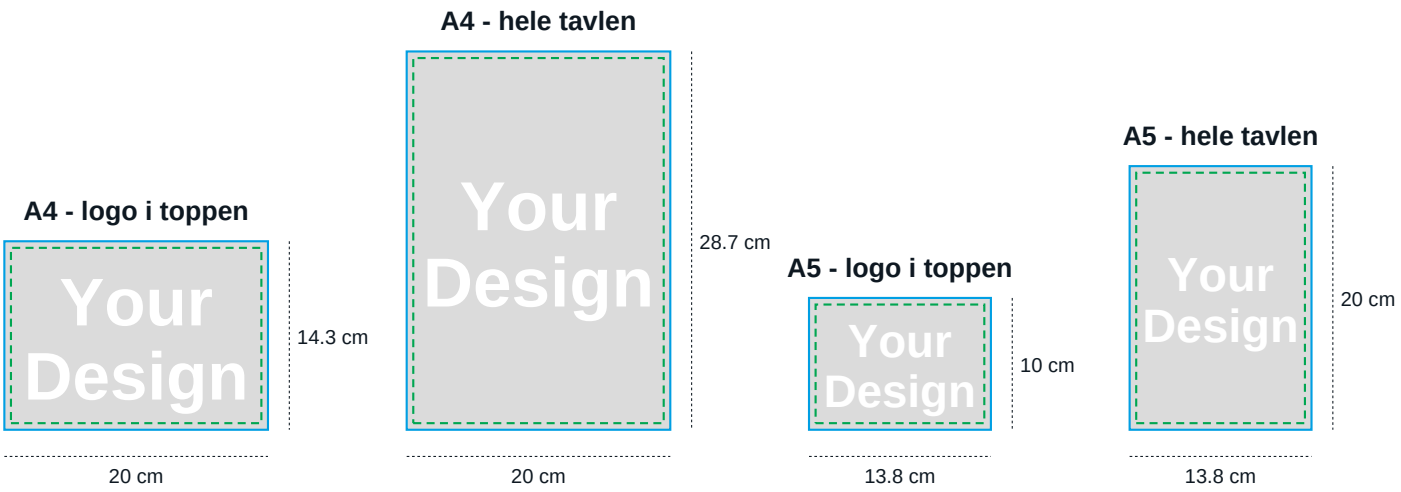

Print area - the area that will be printed.

Safety margin - 5 mm inside the print area. Keep important text and logos inside this area.

Printfile sizes:

A4 - logo i toppen:	200 x 143 mm	(safety area 190 x 133 mm)
A4 - hele tavlen:	200 x 287 mm	(safety area 190 x 277 mm)
A5 - logo i toppen:	138 x 100 mm	(safety area 128 x 90 mm)
A5 - hele tavlen:	138 x 200 mm	(safety area 128 x 190 mm)

File type: PDF (High Quality Print), one page per print/design.

Fonts and graphics: All fonts must be outlined. Logos must be vectorized.

Crop marks: Do not include crop marks or any other printing marks in the document.

Images: All images must be embedded. Resolution must be min. 150 dpi in 1:1.

Colours: Files should be prepared in CMYK (Fogra39 colour profile).

For rich black we recommend C: 30% M: 30% Y: 30% K: 100%.

Note: The print is placed directly on the black chalkboard - no bleed. Areas outside your artwork stay black and writable.

Note: Printed parts cannot be written on with chalk markers.

Note: Double-sided: send one PDF page per side.

! Do not use this designguide as a template.
You can download templates under each of our products on our webshop.